



Miniature  
Weatherproof  
Corrosion resistant  
Max temp rating 400°F

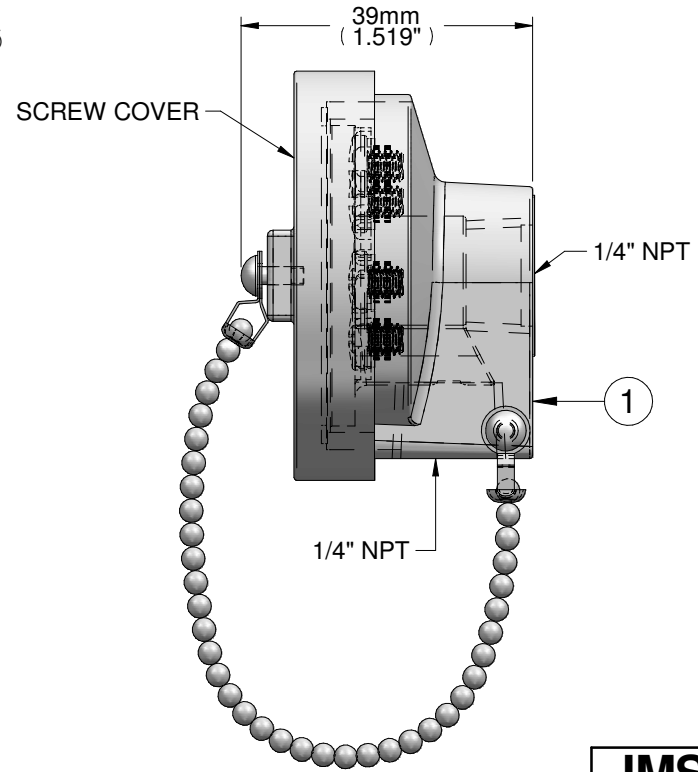

4 INTEGRAL TERMINAL POLES

**JMS PART #**  
**6T**

JMS SOUTHEAST INCORPORATED CERTIFIES THIS DRAWING IS IN ACCORDANCE WITH JMS SOUTHEAST INCORPORATED ENGINEERING SPECIFICATIONS AND ACCURATELY REPRESENTS THE EQUIPMENT FURNISHED. THIS DRAWING IS THE SOLE PROPERTY OF JMS SE, AND MUST BE RETURNED UPON DEMAND IT MAY NOT BE REPRODUCED NOR THE INFORMATION CONTAINED THEREIN USED WITHOUT THE WRITTEN PERMISSION OF JMS SOUTHEAST INCORPORATED

Company Name:

**JMS-SE HEADS**

COLD END TERMINATION  
SELECTION = ST

Drawing #:  
**18262-M**

TOLERANCE TABLE:  
PROBE (L): 0-48" ±1/8"  
48"-144" ±1/4"  
144"+ -1"/+2"  
WIRE (L): <math>-24''</math> -1/2"/+1"  
>24" -1/2"/+2"  
PROT. TUBE (P&U): ±1/4"  
FRACTIONAL DIM: ±1/8"  
DECIMAL DIM:  
XX ±0.10"  
XXX ±0.010"  
XXXX ±0.005"  
UNLESS STATED OTHERWISE

| Approvals   | Initials | Date |
|-------------|----------|------|
| Drafting    |          |      |
| Engineering |          |      |
| Second      |          |      |



**JMS SOUTHEAST, INC.**  
Temperature Measurement  
105 Temperature Lane  
Statesville, North Carolina 28677  
Phone: (704) 873-1835  
Fax: (704) 878-6166  
www.jms-se.com  
Email: sensors@jms-se.com

REV. 4-10-2009

| # | DESCRIPTION   |
|---|---|
| 1 | HEAD, WEATHERPROOF, MINIATURE MOLDED, 1/4" X 1/4" FNPT, STD (400 °F RATING) |