
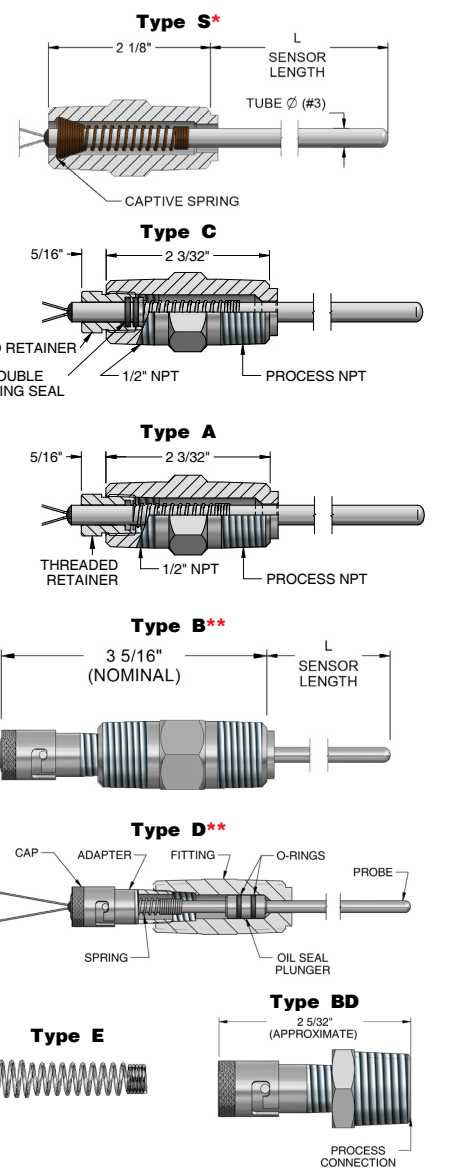


# ATTACHING DEVICES

#1	DESCRIPTION		
6F	Attaching device (fittings)		
#2	TYPE		
H I J K L	Stainless steel ferrule Teflon ferrule Lava ferrule Nylon ferrule Brass ferrule	COMPRESSION	
W	Double threaded	WELDED	
S A C	Double threaded Double threaded w/ plug Double threaded stainless steel with oil seal	SPRING-LOADED	
B D E BD	Double threaded bayonet Double threaded bayonet with oil seal Adjustable stainless steel spring Single threaded bayonet		
#3	OUTSIDE DIAMETER OF TUBE		
P A Y B	1/2" (.500") 3/8" (.375") 5/16" (.313") 1/4" (.250")		R C D
		E F X	
		6mm (.236") 3/16" (.188") 1/8" (.125")	
		1/16" (.063") 1/25" (0.040") Other, specify	
#4	PROCESS CONNECTION		
L M P X Z	1/8" NPT 1/4" NPT 1/2" NPT Other, specify N/A		
#5	FITTING MATERIAL		
K B T X	Stainless steel (Standard) Brass Teflon Other, specify		

**NEW!**  
Double threaded compression fitting  
(Just add a "2" suffix)

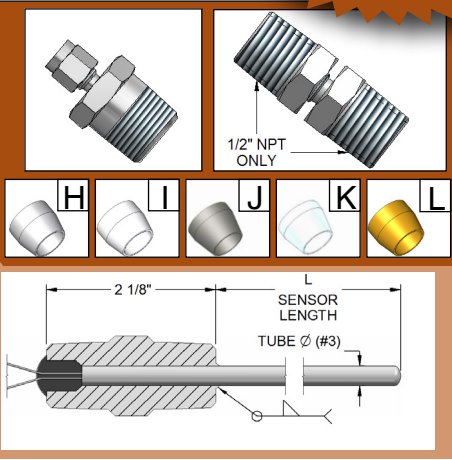

\*JMS springs for .250" O.D. sensors are made from a special material and undergo unique heat treating processes to maintain a loaded compression of at least 1 pound up to 1000° F. Standard stainless steel springs lose 100% of their compression at elevated temperatures.

\*\*Typically used with type 6R & 6P heads. (See page 6-1)

- 6F
- H
- B
- M
- K