


CSA CERTIFIED FLAME PATH SPRING LOADED T/Cs & RTDs

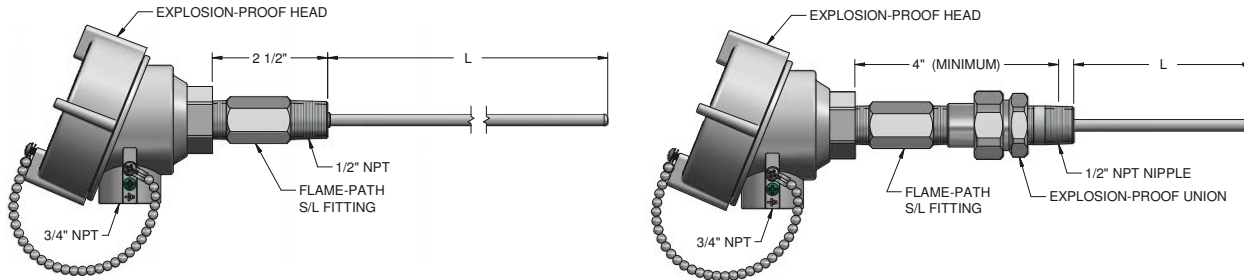

- Spring loaded flame path sensors with CSA certified fittings now available from JMS!
- Order by JMS part number (see pages 1-1 and 3-1, selection 8) or call 1-800-873-1835 for special and custom designs.
- Diametric clearance, finish and internal and external threading meet the special requirements demanded by CSA and the Standards Council of Canada.
- All conduit heads meet CSA Class I, Division 1, Groups B, C, D; Class II & III, Division 2, Groups E, F, G requirements and are labeled and certified accordingly.
- Maximum allowable temperature @ conduit head is 120°C (T4A temp rating).
- Flame-path fitting components are mechanically retained to prevent accidental or inadvertent removal.
- Thermowells (See Section 5) are required for final assembly of sensor into process with spring loaded fitting. For installation in Canada a valid Canadian Registration Number (CRN) is also required for the wells.
- Need a well with a CRN Number? JMS provides thermowells bearing CRN numbers valid in every province in Canada.
- Available with CSA certified transmitter. Call JMS at 1-800-873-1835 for details.