
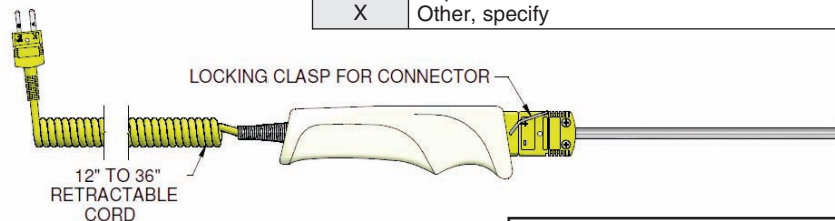


HAND HELD SENSORS

DESCRIPTION

The standard JMS hand held sensor is 316 stainless steel.

#1	DESCRIPTION																								
4H	Hand held sensor																								
	<table border="1"> <thead> <tr> <th>#2</th> <th>TYPE</th> </tr> </thead> <tbody> <tr> <td>J</td> <td>Iron/Constantan, standard limits of error</td> </tr> <tr> <td>K</td> <td>Chromel/Alumel, standard limits of error</td> </tr> <tr> <td>T</td> <td>Copper/Constantan, standard limits of error</td> </tr> <tr> <td>E</td> <td>Chromel/Constantan, standard limits of error</td> </tr> <tr> <td>3</td> <td>RTD 100Ω Platinum .00385 alpha, 3 wire, Class B</td> </tr> <tr> <td>X</td> <td>Other, specify</td> </tr> </tbody> </table>	#2	TYPE	J	Iron/Constantan, standard limits of error	K	Chromel/Alumel, standard limits of error	T	Copper/Constantan, standard limits of error	E	Chromel/Constantan, standard limits of error	3	RTD 100Ω Platinum .00385 alpha, 3 wire, Class B	X	Other, specify										
#2	TYPE																								
J	Iron/Constantan, standard limits of error																								
K	Chromel/Alumel, standard limits of error																								
T	Copper/Constantan, standard limits of error																								
E	Chromel/Constantan, standard limits of error																								
3	RTD 100Ω Platinum .00385 alpha, 3 wire, Class B																								
X	Other, specify																								
	<table border="1"> <thead> <tr> <th>#3</th> <th>OUTSIDE DIAMETER</th> </tr> </thead> <tbody> <tr> <td>A</td> <td>3/8" (.375")</td> </tr> <tr> <td>B</td> <td>1/4" (.250")</td> </tr> <tr> <td>C</td> <td>3/16" (.188")</td> </tr> <tr> <td>D</td> <td>1/8" (.125")</td> </tr> <tr> <td>E</td> <td>1/16" (.063")</td> </tr> <tr> <td>X</td> <td>Other, specify</td> </tr> </tbody> </table>	#3	OUTSIDE DIAMETER	A	3/8" (.375")	B	1/4" (.250")	C	3/16" (.188")	D	1/8" (.125")	E	1/16" (.063")	X	Other, specify										
#3	OUTSIDE DIAMETER																								
A	3/8" (.375")																								
B	1/4" (.250")																								
C	3/16" (.188")																								
D	1/8" (.125")																								
E	1/16" (.063")																								
X	Other, specify																								
	<table border="1"> <thead> <tr> <th>#4</th> <th>LENGTH OF SHEATH (L)</th> </tr> </thead> <tbody> <tr> <td>--"</td> <td>Length in inches</td> </tr> </tbody> </table>	#4	LENGTH OF SHEATH (L)	--"	Length in inches																				
#4	LENGTH OF SHEATH (L)																								
--"	Length in inches																								
	<table border="1"> <thead> <tr> <th>#5</th> <th>MEASURING JUNCTION</th> </tr> </thead> <tbody> <tr> <td>G</td> <td>Grounded</td> </tr> <tr> <td>U</td> <td>Ungrounded (RTDs are always ungrounded)</td> </tr> <tr> <td>E</td> <td>Exposed</td> </tr> <tr> <td>J*</td> <td>Pointed tip, grounded</td> </tr> <tr> <td>K*</td> <td>Pointed tip, ungrounded</td> </tr> <tr> <td>X</td> <td>Other, specify</td> </tr> </tbody> </table> <p>Note: See order symbols on Page 1-1, Row 6 for special junctions such as pointed tip and gas/air. * Provide description when selecting these options.</p>	#5	MEASURING JUNCTION	G	Grounded	U	Ungrounded (RTDs are always ungrounded)	E	Exposed	J*	Pointed tip, grounded	K*	Pointed tip, ungrounded	X	Other, specify										
#5	MEASURING JUNCTION																								
G	Grounded																								
U	Ungrounded (RTDs are always ungrounded)																								
E	Exposed																								
J*	Pointed tip, grounded																								
K*	Pointed tip, ungrounded																								
X	Other, specify																								
	<table border="1"> <thead> <tr> <th>#6</th> <th>PRESENCE OF HANDLE</th> </tr> </thead> <tbody> <tr> <td>H</td> <td>Handle for replaceable probe (See dwg)</td> </tr> <tr> <td>R</td> <td>Permanent handle for non replaceable probe</td> </tr> <tr> <td>X</td> <td>Other, specify</td> </tr> <tr> <td>Z</td> <td>N/A</td> </tr> </tbody> </table>	#6	PRESENCE OF HANDLE	H	Handle for replaceable probe (See dwg)	R	Permanent handle for non replaceable probe	X	Other, specify	Z	N/A														
#6	PRESENCE OF HANDLE																								
H	Handle for replaceable probe (See dwg)																								
R	Permanent handle for non replaceable probe																								
X	Other, specify																								
Z	N/A																								
	<table border="1"> <thead> <tr> <th>#7</th> <th>LEAD WIRE INSULATION AND LENGTH IN INCHES</th> </tr> </thead> <tbody> <tr> <td>S</td> <td>Coil-cord. Length will stretch from 12" to 36" (Standard)</td> </tr> <tr> <td>2_"</td> <td>20 AWG PVC</td> </tr> <tr> <td>3_"</td> <td>20 AWG Teflon</td> </tr> <tr> <td>5_"</td> <td>20 AWG Kapton</td> </tr> <tr> <td>6_"</td> <td>20 AWG Glass braid/Flexible armor overall</td> </tr> <tr> <td>7_"</td> <td>20 AWG Teflon/Flexible armor overall</td> </tr> <tr> <td>8_"</td> <td>20 AWG Glass braid/Stainless steel overbraid</td> </tr> <tr> <td>9_"</td> <td>3 conductor Teflon with overall jacket of Teflon (RTD only)</td> </tr> <tr> <td>10_"</td> <td>3 conductor Teflon/Stainless steel overbraid w/ overall jacket of Teflon. (RTD only)</td> </tr> <tr> <td>Z</td> <td>N/A</td> </tr> <tr> <td>X</td> <td>Other, specify</td> </tr> </tbody> </table>	#7	LEAD WIRE INSULATION AND LENGTH IN INCHES	S	Coil-cord. Length will stretch from 12" to 36" (Standard)	2_"	20 AWG PVC	3_"	20 AWG Teflon	5_"	20 AWG Kapton	6_"	20 AWG Glass braid/Flexible armor overall	7_"	20 AWG Teflon/Flexible armor overall	8_"	20 AWG Glass braid/Stainless steel overbraid	9_"	3 conductor Teflon with overall jacket of Teflon (RTD only)	10_"	3 conductor Teflon/Stainless steel overbraid w/ overall jacket of Teflon. (RTD only)	Z	N/A	X	Other, specify
#7	LEAD WIRE INSULATION AND LENGTH IN INCHES																								
S	Coil-cord. Length will stretch from 12" to 36" (Standard)																								
2_"	20 AWG PVC																								
3_"	20 AWG Teflon																								
5_"	20 AWG Kapton																								
6_"	20 AWG Glass braid/Flexible armor overall																								
7_"	20 AWG Teflon/Flexible armor overall																								
8_"	20 AWG Glass braid/Stainless steel overbraid																								
9_"	3 conductor Teflon with overall jacket of Teflon (RTD only)																								
10_"	3 conductor Teflon/Stainless steel overbraid w/ overall jacket of Teflon. (RTD only)																								
Z	N/A																								
X	Other, specify																								
	<table border="1"> <thead> <tr> <th>#8</th> <th>COLD END TERMINATION [Add'l options see Pg 1-6]</th> </tr> </thead> <tbody> <tr> <td>A</td> <td>Bare ends</td> </tr> <tr> <td>B</td> <td>Miniature plug (Standard)</td> </tr> <tr> <td>C</td> <td>Standard plug</td> </tr> <tr> <td>D</td> <td>Replacement sensor</td> </tr> <tr> <td>X</td> <td>Other, specify</td> </tr> </tbody> </table>	#8	COLD END TERMINATION [Add'l options see Pg 1-6]	A	Bare ends	B	Miniature plug (Standard)	C	Standard plug	D	Replacement sensor	X	Other, specify												
#8	COLD END TERMINATION [Add'l options see Pg 1-6]																								
A	Bare ends																								
B	Miniature plug (Standard)																								
C	Standard plug																								
D	Replacement sensor																								
X	Other, specify																								

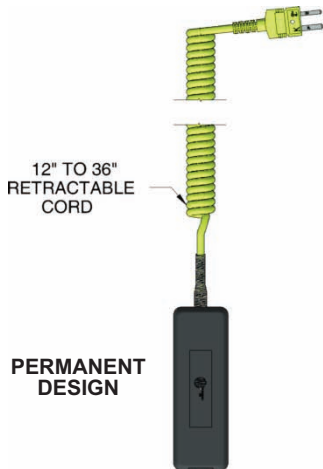

↓	↓	↓	↓	↓	↓	↓	↓
4H	K	B	6"	G	H	S	B

Other styles of hand-held sensors are available.
Contact JMS Southeast, Inc. for your custom design.