


MULTICIRCUIT PANEL WITH MOUNTING FRAME

Multicircuit panels are molded of glass-filled thermoset compounds for high strength and dependability. Panels will withstand ambient temperature of 425°F continuous and 500°F intermittent. One-piece mounting frame is made of 3/32" thick rigid steel with flat black finish. Horizontal mounting style is standard.

#1	DESCRIPTION
6PM	Multicircuit Panel
#2	FRAME STYLE
1	Standard Frame (Maximum number of jacks per row is 24)
2	19" Rack (Maximum number of jacks per row is 22)
#3	TYPE
S	Standard
M	Mini
U	Universal

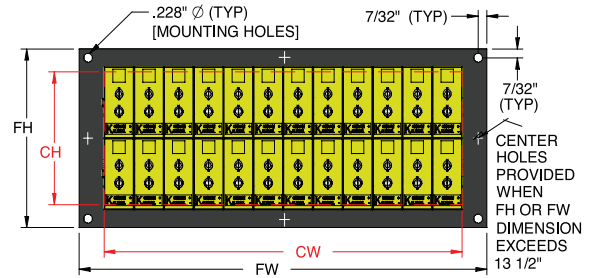

#4	DESCRIPTION	19" RACK NUMBER OF ROWS	STANDARD HEIGHT
1	} Number of horizontal rows	1	3 1/2"
2		2	3 1/2"
3		3	5 1/4"
4		4	7"
X		Other, specify	

#5	DESCRIPTION
#	Total number of circuits
X	Other, specify

Note: We assume an even number of circuits per row.

#6	TYPE	COLOR CODE
J	Iron/Constantan	Black
T	Copper/Constantan	Blue
K	Chromel/Alumel	Yellow
E	Chromel/Constantan	Purple
R	Platinum/Platinum 13% Rhodium	Green
S	Platinum/Platinum 10% Rhodium	Green
A	Copper/Copper	White
N	Nicrosil/Nisil	Orange

#7	# OF POLES
2	2 poles
3	3 poles

Typical arrangement layout for standard or universal. Contact our engineering department for specific drawings.

NUMBER OF ROWS	FH=	CH=	CIRCUITS PER ROW																							
			2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	
1	2 5/8"	1 1/2"	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	
2	4 3/8"	3 1/4"	4	6	8	10	12	14	16	18	20	22	24	26	28	30	32	34	36	38	40	42	44	46	48	
3	6 1/8"	5"	6	9	12	15	18	21	24	27	30	33	36	39	42	45	48	51	54	57	60	63	66	69	72	
4	7 7/8"	6 3/4"	8	12	16	20	24	28	32	36	40	44	48	52	56	60	64	68	72	76	80	84	88	92	96	
5	9 5/8"	8 1/2"	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	95	100	105	110	115	120	
6	11 3/8"	10 1/4"	12	18	24	30	36	42	48	54	60	66	72	78	84	90	96	102	108	114	120	126	132	138	144	
7	13 1/8"	12"	14	21	28	35	42	49	56	63	70	77	84	91	98	105	112	119	126	133	140	147	154	161	168	
8	14 7/8"	13 3/4"	16	24	32	40	48	56	64	72	80	88	96	104	112	120	128	136	144	152	160	168	176	184	192	
9	16 5/8"	15 1/2"	18	27	36	45	54	63	72	81	90	99	108	117	126	135	144	153	162	171	180	189	198	207	216	
10	18 3/8"	17 1/4"	20	30	40	50	60	70	80	90	100	110	120	130	140	150	160	170	180	190	200	210	220	230	240	

↓ ↓ ↓ ↓ ↓

6PM	1	S	3	12	K	2
-----	---	---	---	----	---	---