




RTD WITH INTEGRAL PC PROGRAMMABLE TRANSMITTER

RTD with 4-20 mA INTEGRAL OUTPUT (RTD goes *in*, 4-20mA *OUT*!!)

INDUSTRIAL STYLE INTEGRAL TRANSMITTER (Transmitter Option See Pg. 3-2, #14, 8M)

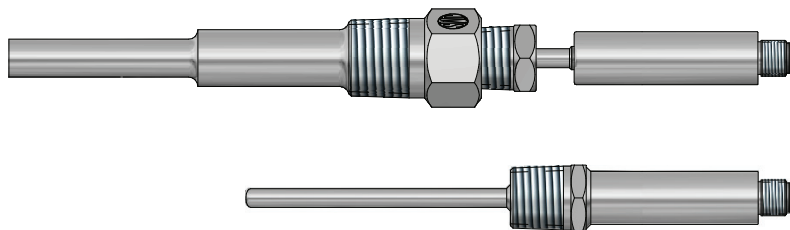

JMS PART #	DESCRIPTION
6SKWT*	M12 CORDSET, 4 POLE, FEMALE, STRAIGHT, IP67, 197" (5 METERS) LENGTH
6RKWT*	M12 CORDSET, 4 POLE, FEMALE, RIGHT ANGLE, IP67, 197" (5 METER) LENGTH

*Add an X to the end of the part # to specify a custom cord length.

FEATURES:

- PC Programmable,
- NEMA 6P (IP67) rated with M12 connector.
- Ideal for most applications from -60 to 320°F.
- Ambient Temperature limits -40 to 185°F.
- Quick-n-Clean M12 connection for easy replacement.
- Carry a 4-20 mA to your PLC directly from the RTD with no special equipment.
- Available in fixed immersion and spring loaded for thermowells!!

See Pg. 4-3 for wiring diagrams.

**Ideal for
high moisture
environments!**