




# WIRE, GASKET, AND LUG THERMOCOUPLES

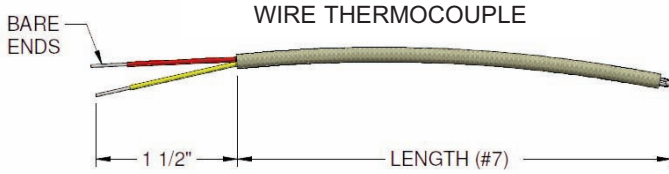

SPADE LUG TERMINAL THERMOCOUPLE

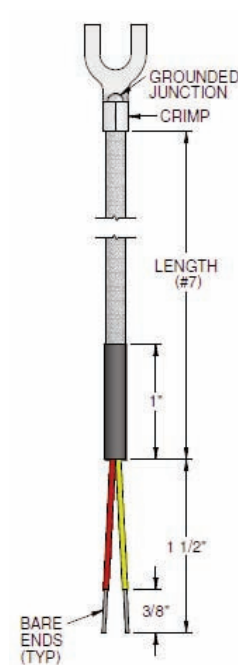


RING TERMINAL THERMOCOUPLE

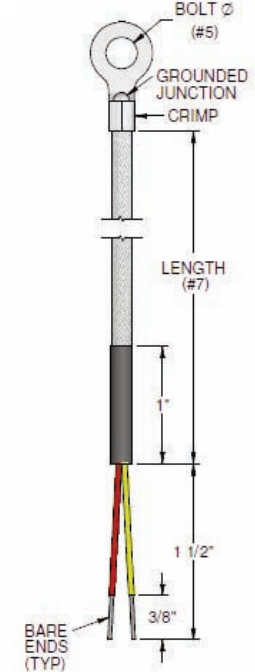

| #1 | DESCRIPTION  |
|----|--|
| 1D | Wire Gasket and Lug Thermocouples - Grounded               |
| #2 |  |
| G  | Wire thermocouple  |
| H  | Gasket thermocouple  |
| L  | Ring Terminal thermocouple                                 |
| S  | Spade Lug thermocouple                                     |
| M  | Shim thermocouple (Must select Option 8 from Selection #6) |
| #3 | TYPE (Ex: J, T, K, N, E, etc.)                             |
| —  | J, K, N, T, E, R, S, B, C, L, A, X (Other, specify)        |
| #4 | GASKET MATERIAL  |
| C  | Copper (Standard)  |
| S  | Stainless steel  |
| X  | Other, specify   |
| Z  | N/A  |

SHIM THERMOCOUPLE

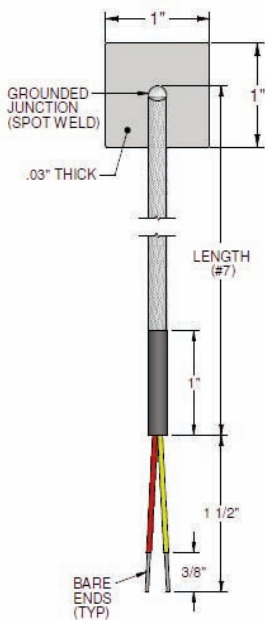

|     |   |  |
|-----|---|--|
| #5  | BOLT DIAMETER   |  |
| A   | #10   | <b>Note:</b> If washer / ring O.D. is critical, use X and state requirements. RIN  |
| C   | 1/4"  |  |
| X   | Other, specify bolt size and O.D. of washer as necessary. |  |
| ZP  | N/A   |  |
| #6  | WIRE INSULATION   |  |
| 1   | Glass braid   | <b>Note:</b> For stranded wire, add "S" before symbol designation in this column. 24 AWG or smaller may be used to accommodate some smaller diameters. |
| 3   | FEP teflon  |  |
| 4   | Hi-temp glass braid                                       |  |
| 5   | Kapton  |  |
| 8   | Glass braid / stainless steel overbraid                   |  |
| X   | Other, specify  |  |
| #7  | DESCRIPTION   |  |
| --" | Length in inches  |  |
| #8  | COLD END TERMINATION                                      | [Add'l options see Pg. 1-6]  |
| A   | Bare ends   |  |
| B   | Miniature plug  |  |
| C   | Standard plug   |  |
| X   | Other, specify (See page 1-2, Row#13 for more options)    |  |

|    |   |   |   |   |   |     |   |
|----|---|---|---|---|---|-----|---|
| 1D | G | K | Z | Z | 1 | 36" | C |
|----|---|---|---|---|---|-----|---|